


DESCRIPTION


5,000-lbf / 22kN Removable Bolt Anchor.

A removable and reusable anchor designed to work in 20mm (3/4") drilled hole in concrete substrates.

RAF075N

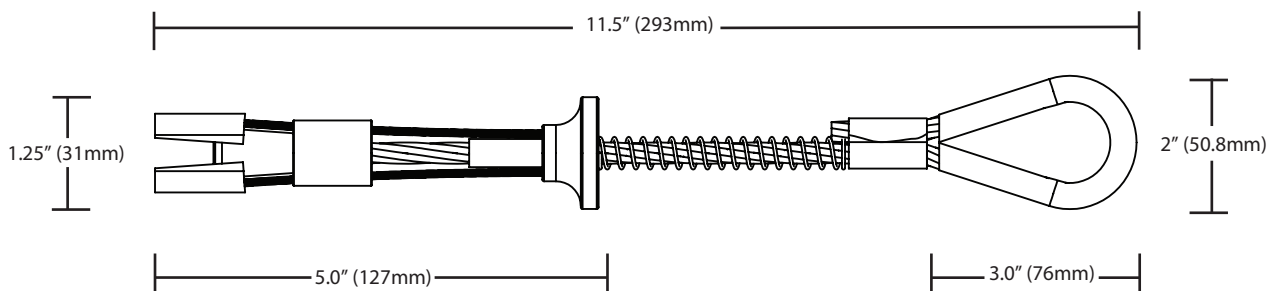

HOLE DRILLING REQUIREMENT CHART	
(A)" Minimum distance from edge/corner	(B)" Concrete thickness
6" (15.3 cm)	12" (30.5 cm)
12" (30.5 cm)	5" (12.7 cm)

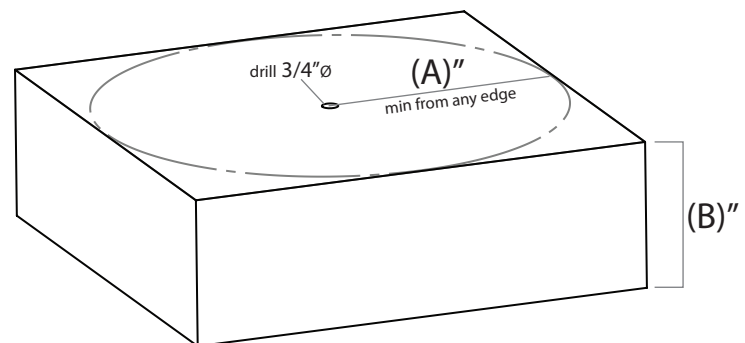

SPECIFICATIONS

<p>▼ UTS 5,000-lbf / 22kN</p>	<p>▼ Max User Weight 310-lbs / 140kg</p>	<p>▼ Working Load 1000-lbs / 454kg</p>
--	---	---

MATERIALS

<p>▼ Spoons Stainless Steel</p>	<p>▼ Swage Zinc Plated Copper</p>	<p>▼ Cone Stainless Steel</p>	<p>▼ Anchor Loop Polyurethane</p>
<p>▼ Cleaning Bushing Zinc Plated Steel</p>	<p>▼ Spring Zinc Plated Steel</p>	<p>▼ Stop Sleeve Stainless Steel</p>	<p>▼ Trigger Aluminum</p>
<p>▼ Main Cable Aircraft Cable</p>	<p>▼ Return Wire Aircraft Cable</p>		

PRODUCT CONFIGURATIONS

MODEL	APPLICATION	COLOR	LOADING	WEIGHT
RAF075N	Concrete	Blue	5,000-lbf (22kN)	200g